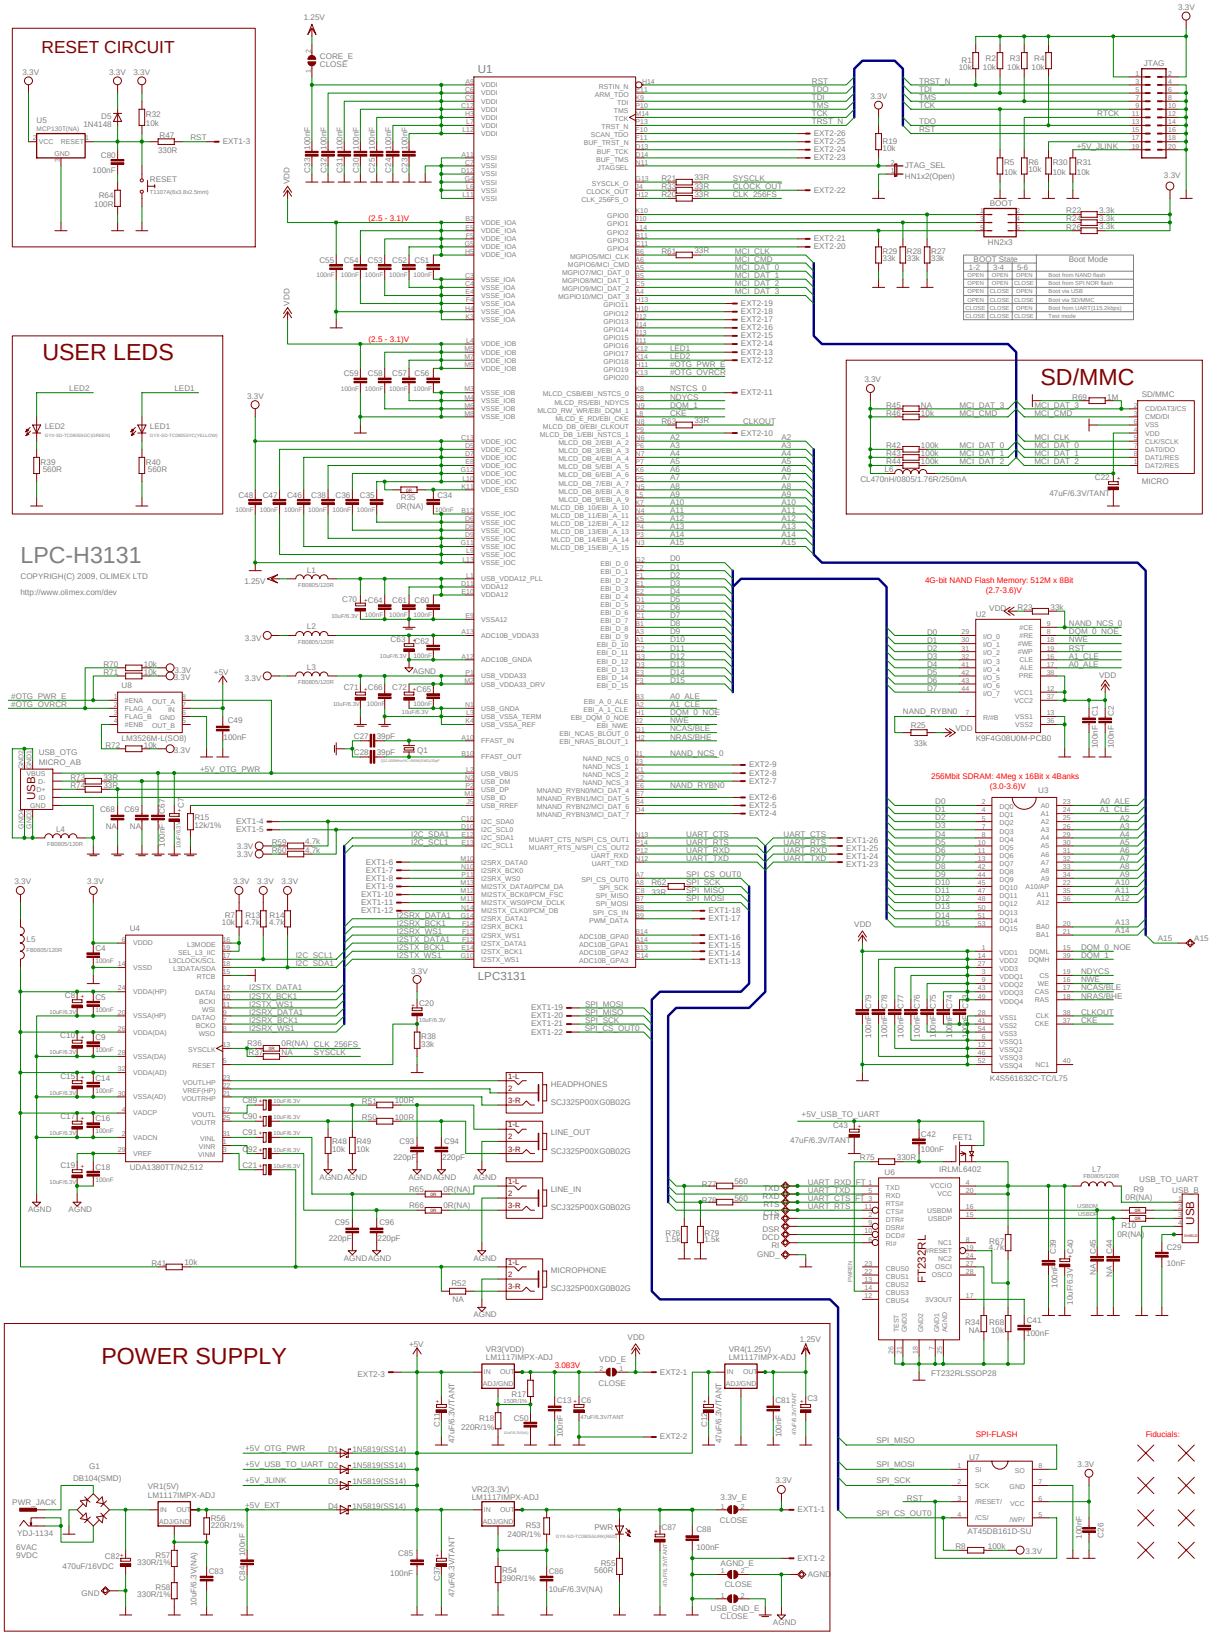
RESET CIRCUIT
USER LEDS
LPC-H3131
COPYRIGH(C) 2009, OLIMEX LTD
http://www.olimex.com/dev
U1
LPC3131
SD/MMC
MICRO
JTAG
BOOT
4G-bit NAND Flash Memory: 512M x 8Bit (2.7-3.6)V
K9F4G08U0M-PCB0
256Mbit SDRAM: 4Meg x 16Bit x 4Banks (3.0-3.6)V
K4S561632C-TC/L75
HEADPHONES
LINE_OUT
LINE_IN
MICROPHONE
UDA1380TT/N2,512
FT232RL
FT232RLSSOP28
POWER SUPPLY
SPI-FLASH
AT45DB161D-SU
Fiducials: