Digital Spectrum Analyzer

GA40XX Series

1.5GHz/3GHz/7.5GHz

Professional Performance
Robust Measurement features
High Frequency Stability
Easy- to-use User Interface
Compact size, Light weight, Portable design







GA4062/GA4032

9kHz~1.5GHz

GA4033/GA4063

9kHz~3GHz

GA4064

9kHz~7.5GHz

Product Overview

GA40XX series is a small size, light weight, cost-effective portable spectrum analyzer to meet your all the RF application demands. It has easy-to-keyboard layout and high-definition 8.5-inch TFT color LCD display; display contains the appropriate settings and alerts. It includes the standard USB, LAN and RS232 communication interface, virtual terminal display and control and remote network access. The spectrum analyzer can be widely applied in many fields of science education, enterprise research and development and industrial production.

Features

- Frequency range of 9 kHz to 1.5GHz/3GHz/7.5GHz
- Displayed average noise level (DANL) <-148 dBm
- Phase Noise -90 dBc/Hz, -95 dBc/Hz, -100 dBc/Hz (Offset 10 kHz)
- Full amplitude accuracy < 1.0 dB
- Minimum resolution bandwidth (RBW) 1 Hz
- · Standard preamplifier
- 1.5GHz/3GHz/7.5GHz Tracking Generator(Optional)
- Measurement capabilities and a variety of automatic settings
- 8.5-inch (800x480) widescreen display
- The interface is simple and rich in affinity, operation and has user-friendly design
- · Compact portable design, weighing less than 7 kg

TECHNICAL SPECIFICATIONS

Model No	GA4062	GA4032	GA4033	GA4063	GA4064		
Frequency Specifications				'			
Frequency range	The state of the s	1.5GHz	9kHz ~	- 3GHz	9kHz ~ 7.5GHz		
Internal 10 MHz frequency reference acc	curacy						
Initial calibration accuracy	$\pm 1 \times 10^{-7}$						
Aging rate	\pm 0.1ppm /year	±1ppm/year		\pm 0.1ppm /year			
Temperature stability	\pm 5 $ imes$ 10 ⁻⁸ Ref	erenced to frequency	reading at 0-50 °C				
Frequency readout accuracy with marke	r (start, stop, center, m	arker)					
Marker resolution	(frequency span)/(sweep points -1)					
Uncertainty	± (frequency inc	dication $ imes$ frequency r	eference uncertainty	$+1\% \times span$			
Officertainty	+10% ×resolut	$+10\% \times \text{resolution bandwidth} + \text{marker resolution} + 1 \text{ Hz})$					
Frequency reference uncertainty	= (aging rate $ imes$	= (aging rate \times period of time since adjustment + temperature stability)					
Marker frequency counter							
Resolution	1 Hz						
Accuracy	± (marker freque	\pm (marker frequency $ imes$ frequency reference uncertainty \pm counter resolution)					
(marker level to displayed noise level >							
25 dB; frequency offset 0 Hz)							
Frequency span							
Range	OHz (zero span),	OHz (zero span), 100 Hz to 3GHz					
Resolution	1 Hz	1 Hz					
Accuracy	±span/(sweep p	±span/(sweep points -1)					
SSB phase noise							
	<-100dBc/Hz@10kHz	< -90dBc/l	Hz@10kHz	< -95dBc	/Hz@10kHz		
	(Ce	enter frequency 500 M	IHZ, RBW=100Hz, VE	$3W = 1Hz 20 ^{\circ}C \text{ to } 3$	O°C)		
Resolution bandwidth (RBW)		_					
-3 dB bandwidth	1 Hz ∼ 3 MHz	100 Hz	∼ 1 MHz	1 Hz ~	- 3 MHz		
Accuracy	± 5%, RBW = 1	Hz to 1 MHz Nominal,	, $\pm 20\%$, RBW = 3 M	Hz			
Resolution filter shape factor	< 5:1						
Video bandwidth (VBW)							
-3 dB bandwidth	1 Hz to 3 MHz, 1	-3-10 sequence					

Amplitude specifications			
Measurement range	+30dBm to displayed average noise level (DANL)		
Input attenuator range	0 dB to 50 dB, in 10 dB steps		
Maximum safe input level			
Average continuous power	+30 dBm, (3 minutes maximum, Input attenuator≥20 dB, preamplifier off		dB, preamplifier off
DC voltage	50V		25V
Displayed average noise level			
Preamp on	≤−148dBm -160dBm Typical value	≤−128dBm -140dBm Typical value	≤−148dBm -160dBm Typical value
Preamp off	<-130dBm	<-110dBm	<-130dBm

0% to 100%, 10 dBm, dBmV, dBu 501 0.01 dB ≤1% of signal le Normal, Positive 3 Clear/write, Max	peak, Sample, Negativ	mW, W	on	
0% to 100%, 10 dBm, dBmV, dBu 501 0.01 dB ≤1% of signal le Normal, Positive 3 Clear/write, Max	divisions displayed V, dBuV/m, uV, mV, V, wel Nominal peak, Sample, Negativ	mW, W	on	
0% to 100%, 10 dBm, dBmV, dBu 501 0.01 dB ≤1% of signal le Normal, Positive 3 Clear/write, Max	divisions displayed V, dBuV/m, uV, mV, V, wel Nominal peak, Sample, Negativ	mW, W	on	
dBm, dBmV, dBu 501 0.01 dB ≤1% of signal le Normal, Positive 3 Clear/write, Max	vel Nominal peak, Sample, Negativ			
501 0.01 dB ≤1% of signal le Normal, Positive 3 Clear/write, Max	vel Nominal peak, Sample, Negativ			
0.01 dB ≤1% of signal le Normal, Positive 3 Clear/write, Max	peak, Sample, Negativ	re peak		
≤1% of signal le Normal, Positive 3 Clear/write, Max	peak, Sample, Negativ	re peak		
≤1% of signal le Normal, Positive 3 Clear/write, Max	peak, Sample, Negativ	re peak		
Normal, Positive 3 Clear/write, Max	peak, Sample, Negativ	re peak		
3 Clear/write, Max		ve peak		
Clear/write, Max				
+ ID 6 dB + froque	imum hold, Minimum I	nold, View		
± (0.0 ub + 11cqu	ency response), all fre	quency		
±1 dB	, , ,	,		
-110 dBm to +30	dBm steps of 1 dB			
0.01 dB	•			
0.0.0				
0				
< 1.5:1, (10 MHz	to 3 GHz, 10 dB or 20	dB attenuation)		
• • • • • • • • • • • • • • • • • • • •	•			
< -70dBc, (Mixe	r signal level at -40 dBr	n, input attenuation 0	dB, preamp off)	
< -70dBc,(Two -3	30 dBm tones at input	mixer, spaced by 1M	Hz	
	·	,		
< -60dBc, (-30 dBm signal at input mixer)				
		-	preamplifier off)	
10ms to 3000s, S	span≥100 Hz;100µs t	o 100s, Span = 0 Hz	(zero span)	
Continuous, single	9		· · · ·	
N-Type female 50) Ω Nominal.			
, - 0 . 0				
10 MHz				
	lm			
	lm			
	±1 dB -110 dBm to +30 0.01 dB (2.236 µV to 7.07 0 < 1.5:1, (10 MHz < -70dBc, (Mixel < -70dBc, (Two -3) input attenuation < -60dBc, (-30 d) <-88dBm, (Input 10ms to 3000s, S Continuous, single Free run, Line trig Positive or Negati N-Type female, 50 10 MHz 0 dBm to +10 dB 10 MHz 0 dBm to +10 dB	± 1 dB -110 dBm to ± 30 dBm steps of 1 dB 0.01 dB (2.236 μ V to 7.07 V) 0 < 1.5:1, (10 MHz to 3 GHz, 10 dB or 20 < -70dBc, (Mixer signal level at -40 dBr < -70dBc, (Two -30 dBm tones at input input attenuation 0 dB, preamp off) < -60dBc, (-30 dBm signal at input mix <-88dBm, (Input terminated 50 Ω and 10ms to 3000s, Span≥100 Hz;100 μ s to Continuous, single Free run, Line trigger, External trigger Positive or Negative edge available N-Type female, 50 Ω Nominal. 10 MHz 0 dBm to +10 dBm	-110 dBm to +30 dBm steps of 1 dB 0.01 dB (2.236 μV to 7.07 V) 0 (10 MHz to 3 GHz, 10 dB or 20 dB attenuation) < -70dBc, (Mixer signal level at -40 dBm, input attenuation 0 dB, preamp off) < -60dBc, (-30 dBm signal at input mixer) < -88dBm, (Input terminated 50 Ω and 0 dB RF attenuation, lines to 3000s, Span≥100 Hz;100μs to 100s, Span = 0 Hz Continuous, single Free run, Line trigger, External trigger Positive or Negative edge available N-Type female, 50 Ω Nominal. 10 MHz 0 dBm to +10 dBm 10 MHz 10 dBm to +10 dBm 10 dBm to	±1 dB -110 dBm to +30 dBm steps of 1 dB 0.01 dB (2.236 μV to 7.07 V) 0 < 1.5:1, (10 MHz to 3 GHz, 10 dB or 20 dB attenuation) < -70dBc, (Mixer signal level at -40 dBm, input attenuation 0 dB, preamp off) < -70dBc,(Two -30 dBm tones at input mixer, spaced by 1MHz input attenuation 0 dB, preamp off) < -60dBc, (-30 dBm signal at input mixer) <-88dBm, (Input terminated 50 Ω and 0 dB RF attenuation, preamplifier off) 10ms to 3000s, Span≥100 Hz;100μs to 100s, Span = 0 Hz (zero span) Continuous, single Free run, Line trigger, External trigger Positive or Negative edge available N-Type female, 50 Ω Nominal. 10 MHz 0 dBm to +10 dBm 10 MHz 0 dBm to +10 dBm

GA4062	GA4032	GA4033	GA4063	GA4064
Phase noise, Adja	cent channel power, (Occupied bandwidth.		
Third order interm	odulation distortion, F	Pass/Fail, Standing wav	ve ratio.	
	Phase noise, Adja	Phase noise, Adjacent channel power, (Phase noise, Adjacent channel power, Occupied bandwidth.	

Interface	
Host connector	USB Type-A female
Device connector	USB Type-mini AB female, LAN, RS232 or VGA

General specifications	
Display	
Resolution	800 pixels x 480 pixels
Size and type	8.5 inch TFT color display
Languages	On-screen GUI: English, Simplified Chinese


Power requirements	
Adaptor voltage	100 V to 240 V AC, Rate 50/60/400 Hz , Auto-ranging
Power consumption	less than 35W

Environmental and size	
Temperature range	0 °C to +40 °C (Operating)
	$-40~^{\circ}\text{C}$ to $+70~^{\circ}\text{C}$ (Storage)
Relative humidity	< 95%
Weight	less than 7kg
Dimensions	410 mm $ imes$ 210mm $ imes$ 136 mm, Approximately (W x H x D)


Tracking generator (Optional)			
Frequency range	5MHz∼1.5GHz	5MHz∼3GHz	5MHz~7.5GHz
Output level	0 dBm to -25 dBm, 1 dB steps		
Output flatness	± 3dB		
VSWR	< 2.0: 1, Nominal		
Connector and impedance	N-Type female, 50 Ω		

AM / FM Demodulation Measurement-except GA4032 (Optional)		
AM Demodulation		
Modulation Frequency	20Hz~100kHz	
Frequency Accuracy	1Hz (Modulation Frequency < 1kHz)	
	0.1% (Modulation Frequency≥1kHz)	
Modulation Depth	5~95%	
Depth Measurement Precision	±4%	
FM Demodulation		
Modulation Frequency	20Hz~200kHz	
Frequency Accuracy	1Hz (Modulation Frequency < 1kHz)	
	0.1% (Modulation Frequency≥1kHz)	
Frequency Offset	20Hz~400kHz	
Frequency Offset Precision	$\pm 4\%$	
SINAD		
Measurement Range	0~60dBc	
Measurement Precision	± 1 dB	


Advanced Measurement Functions

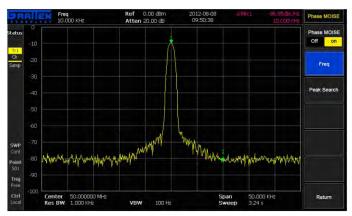


Phase noise measurement display

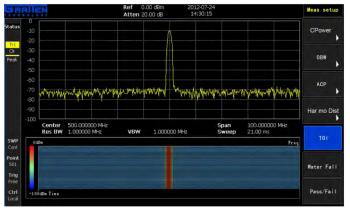


Waterfall plot display

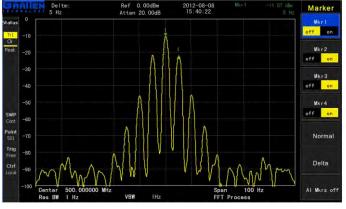


Distinguish similar nearby signal at RBW 1Hz

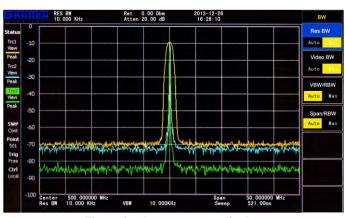

Three simultaneous trace display at RBW 1M/100K/10K

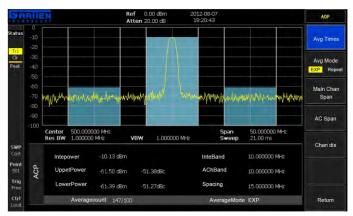

Adjacent channel power

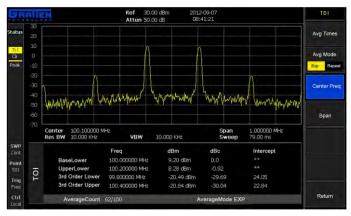

Third order intermodulation distortion



Add: Building A8, Tanglang Industrial Zone, Xili, Nanshan, Shenzhen, 518055, P. R. China Tel: +86-755-6161 8252/ 6161 8291/2655 9660

Fax: +86-755-8602 1299 E-mail: atten8@atten.com.cn Http:// www.glarun-atten.com



(CBT024094)-D

We pursue a policy of continuous development and product improvement. Thus the specifications and picture in this Spec sheet may be changed to make product improvements at any time and without notice.